

**Submittal Data: WMO36MH16S** 36,000 BTU/H Wall Mounted Heat- Pump System

Job Name Location Date

Purchaser Engineer

Submitted To For  Reference  Approval  Construction

Unit Designation Schedule No.

**GENERAL FEATURES**  
 -Up to 4 Indoor Units Comfort (4-Port)  
 -G10 DC Inverter Technology  
 -Quiet Operation - Both Indoor & Outdoor  
 -Wireless Remote Controller  
 -Optional Wired Remote Controller (PN: MC207059)  
 -Gold Fin Coil Coating  
 -Intelligent Defrost  
 -Auto Restart on Power Outages  
 -Limited 7 yr Compressor & 5 yr Parts Warranty

**System Ratings**

**Cooling**  
 Rated Capacity 34,000 BTU/H  
 Capacity Range 8,530-34,120 BTU/H  
 Power Input (Max) 4,300 W  
 SEER 16

**Heating at 47° F**  
 Rated Capacity 35,800 BTU/H  
 Capacity Range 10,662-40,944 BTU/H  
 Input Power (Max) 3,600 W  
 HSPF 8.2  
 COP 2.9

**Heating at 17° F**  
 Rated Capacity 22,000 BTU/H

**Operating Range**

Cooling	(Max)	118°F (48 C)
	(Min)	23°F (-5 C)
Heating	(Max)	80°F (27 C)
	(Min)	5°F (-15 C)

**Power Supply**  
 Normal Operational Voltage 208/230 V, 1 Phase, 60 Hz  
 Voltage Range 187 - 253 V  
 Main Power Wire Size 8-2 AWG  
 Interconnecting Cable Wire Size 14-4 AWG  
 MCA 28.0 A  
 MOCP/Breaker Size 45 A

**Outdoor Unit Data**

<b>Compressor</b>	Type	DC Inverter Driven Rotary
	RLA	21.0 A
<b>Fan Motor</b>	Output Power	120 W
	FLA	0.7 A
	Air Flow (Max)	2,177 CFM

**Sound Power (Per AHRI 270 and AHRI 350)**


Cooling	69 db(A)
Heating	69 db(A)

**Dimensions & Weights**

Unit Dimensions (LxHxD)	39.1 x 31.0 x 16.8 -in
Weight (Net/Shipping)	165/153 LBS
Min. Number of Indoor Units	3
Max. Number of Indoor Units	4

**Refrigerant Piping Data**

Connection Method	Flared
Refrigerant Type	R410A
Factory Charge for Total Line Length	130-ft
Additional Charge Per Line Length	0.2-oz/ft
Total Refrigerant Pipe Length	230-ft
Max Refrigerant Piping Length to any Indoor Unit	82-ft
Min Refrigerant Piping Length to any Indoor Unit	10-ft
Max Elevation between Indoor Units	25-ft
Max Lift from Outdoor to Indoor Unit	50-ft
Max Lift from Outdoor to Indoor Unit	50-ft






# OUTDOOR UNIT DIMENSIONAL SPECIFICATIONS

# WMO36MH16S

Units: inch (mm)

## 36,000 BTUH MODEL

Model # WMO36MH16S 36,000 BTUH 230V

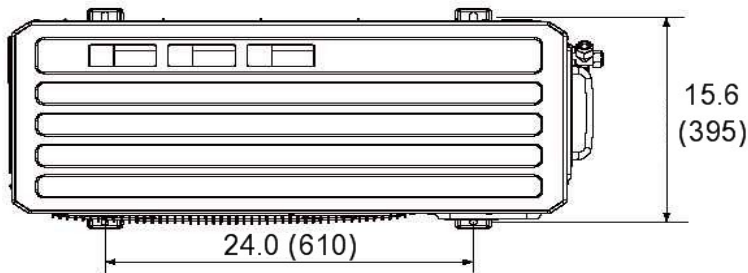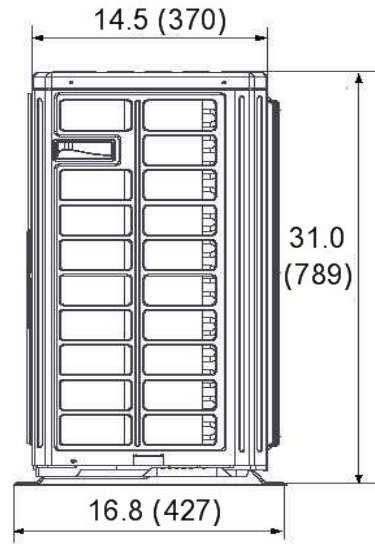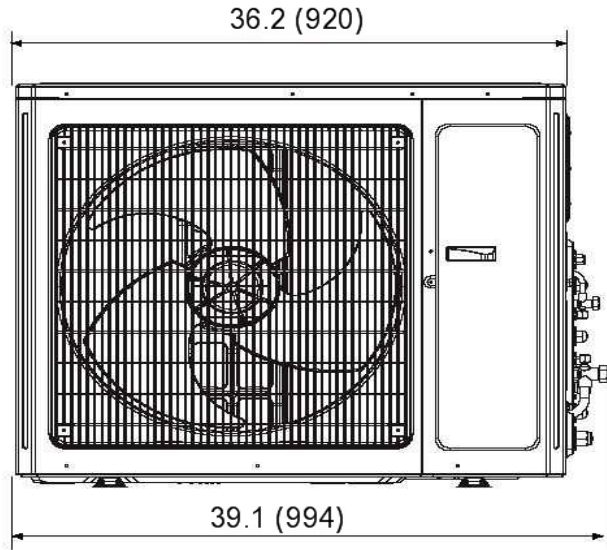

### Suction/Gas Line Port Size



Port #1	3/8-in OD Flared
Port #2	3/8-in OD Flared
Port #3	1/2-in OD Flared
Port #4	5/8-in OD Flared

### Liquid Line Port Size

Port #1	1/4-in OD Flared
Port #2	1/4-in OD Flared
Port #3	1/4-in OD Flared
Port #4	3/8-in OD Flared

## MINIMUM SPACING REQUIREMENTS

Units: inch (mm)

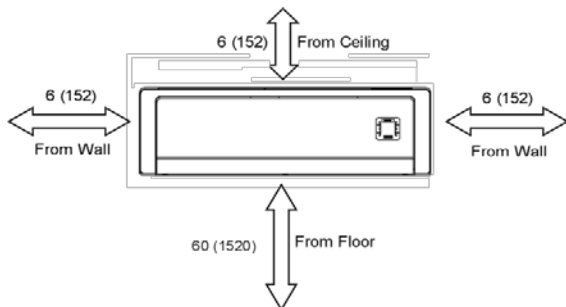

### Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.





Units: inch (mm)

**9,000 AND 12,000 BTUH MODELS**

Model # WMI09MH16S 9,000 BTUH 230V

Model # WMI12MH16S 12,000 BTUH 230V

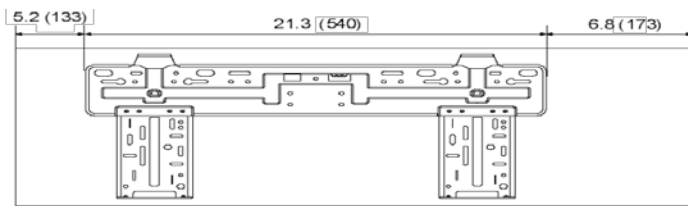

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	3/8-in OD Flared
Drain Connector	5/8-in OD




*Note: Size Refrigerant lines based on evaporator port sizes.*

Indoor Capacity Size	Fan (watts)	CFM (High)	Sound Power (Low/High)**
9,000 BTUH	20	330	26/41
12,000 BTUH	20	341	28/42

Units: inch (mm)

**18,000 BTUH MODEL**

Model # WMI18MH16S 18,000 BTUH 230V

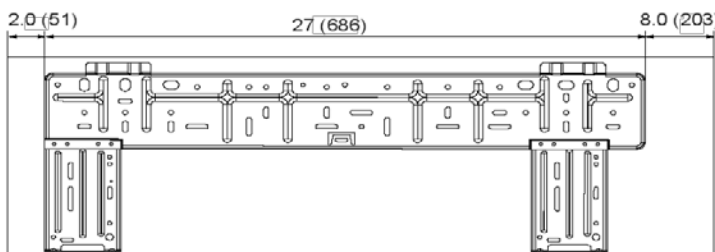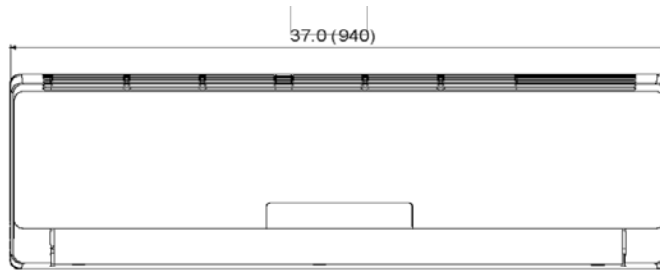

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	1/2-in OD Flared
Drain Connector	5/8-in OD

*Note: Size Refrigerant lines based on evaporator port sizes.*

Indoor Capacity Size	Fan (watts)	CFM (High)	Sound Power (Low/High)**
18,000 BTUH	20	500	35/46

\*\*Sound Power ratings are per AHRI 270 and AHRI 350

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.



**COOLING CAPACITY (BTUH)**

Indoor Combinations	Indoor Unit A	Indoor Unit B	Indoor Unit C	Indoor Unit D	Indoor Unit E
18K + 18K	16,207	16,207			
9K + 9K + 9K	8,189	8,189	8,189		
9K + 9K + 12K	6,995	7,336	10,236		
9K + 9K + 18K	7,165	7,165	15,354		
9K + 12K + 12K	7,506	11,089	11,089		
9K + 12K + 18K	6,142	10,065	13,477		
9K + 18K + 18K	5,971	11,771	11,771		
12K + 12K + 12K	9,895	9,895	9,895		
12K + 12K + 18K	8,530	8,530	12,624		
12K + 18K + 18K	9,212	12,283	12,283		
18K + 18K + 18K	9,895	9,895	9,895		
9K + 9K + 9K + 9K	8,359	8,359	8,359	8,359	
9K + 9K + 9K + 12K	7,506	7,506	7,506	10,918	
9K + 9K + 9K + 18K	6,824	6,824	6,824	12,283	
9K + 9K + 12K + 12K	6,824	6,824	9,895	9,895	
9K + 9K + 12K + 18K	6,312	6,312	8,871	12,283	
9K + 9K + 18K + 18K	5,459	5,459	11,260	11,260	
9K + 9K + 12K + 12K	7,848	8,530	8,530	8,530	
9K + 12K + 12K + 18K	6,142	7,506	7,506	12,283	
12K + 12K + 12K + 12K	8,359	8,359	8,359	8,359	

**HEATING CAPACITY (BTUH)**

Indoor Combinations	Indoor Unit A	Indoor Unit B	Indoor Unit C	Indoor Unit D	Indoor Unit E
18K + 18K	16,378	16,378			
9K + 9K + 9K	9,008	9,008	9,008		
9K + 9K + 12K	7,694	8,069	11,260		
9K + 9K + 18K	8,598	8,598	18,425		
9K + 12K + 12K	9,008	13,307	13,307		
9K + 12K + 18K	7,370	12,078	16,173		
9K + 18K + 18K	7,165	14,126	14,126		
12K + 12K + 12K	11,874	11,874	11,874		
12K + 12K + 18K	10,236	10,236	15,149		
12K + 18K + 18K	11,055	14,740	14,740		
18K + 18K + 18K	11,874	11,874	11,874		
9K + 9K + 9K + 9K	10,031	10,031	10,031	10,031	
9K + 9K + 9K + 12K	9,008	9,008	9,008	13,102	
9K + 9K + 9K + 18K	8,189	8,189	8,189	14,740	
9K + 9K + 12K + 12K	8,189	8,189	11,874	11,874	
9K + 9K + 12K + 18K	7,575	7,575	10,645	14,740	
9K + 9K + 18K + 18K	6,551	6,551	13,512	13,512	
9K + 9K + 12K + 12K	9,417	10,236	10,236	10,236	
9K + 12K + 12K + 18K	7,370	9,008	9,008	14,740	
12K + 12K + 12K + 12K	10,031	10,031	10,031	10,031	

Cooling Norminal Test Conditions  
 Indoor: 80°F DB/67°F WB  
 Outdoor: 95°F DB/75°F WB

Heating Norminal Test Conditions  
 Indoor: 70°F DB/60°F WB  
 Outdoor: 47°F DB/43°F WB



Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs

without notice or without incurring obligations. All rights reserved.