

Single zone inverter mini split

MODEL: WAM12MH25S



Job Name:

Engineer Name:

System No:

- File Resubmit
- Approval Other

Location:

Contractor:

Date:

General Features

- Smart 1 Hertz Inverter Technology
- Low Ambient Cooling to 5 °F
- 7 Fan Speeds - from Mute to Turbo
- Technology 4-Way Airflow Operation
- Extended Airflow (9k & 12k sizes)
- Waterfall Heating Airflow
- Photocatalytic Filter
- Dry Anti-mildew Design
- LED Display
- Gold Fin Condenser
- Low Voltage Start-up
- Intelligent Pre-heating / Defrost
- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection



Unit Performance:

<i>Cooling:</i>	
Capacity (Min-Rated-Max, Btu/h)	3,100-12,000-13,000
<i>Heating:</i>	
Capacity (Min-Rated-Max, Btu/h)	2,400-13,000-14,000

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 18
Indoor Fan Motor RLA (A)	0.07

Unit Specification

Refrigerant Type	R410A
Refrigerant Charge (oz)	45.9
IDU Sound Pressure (dB(A))	24/44
IDU Net Weight (lbs)	24.2
Dehumidifying (Pint/h)	2.96

Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	1/2
Additional Refrigerant (oz./ft.)	0.215
Max Pipe Length (ft.)	65.6
Piping Length (no add'l refrigerant, ft.)	24.6
Max Elevation (ft.)	32.8

Fan

IDU Type	Cross-flow
Quantity (IDU)	1
Motor/Drive	Direct Drive
IDU Air Flow Rate (CFM)	118/453





Single zone inverter mini split


MODEL: WAM12MH25S



Outline Dimension Diagram

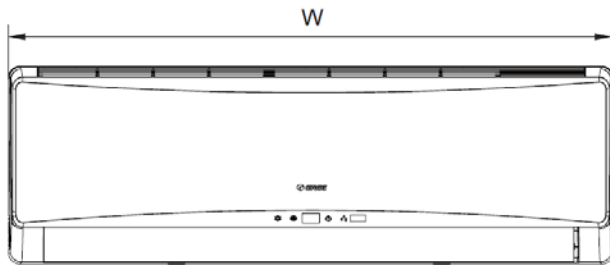

W	H	D
34.1	11.5	8.2

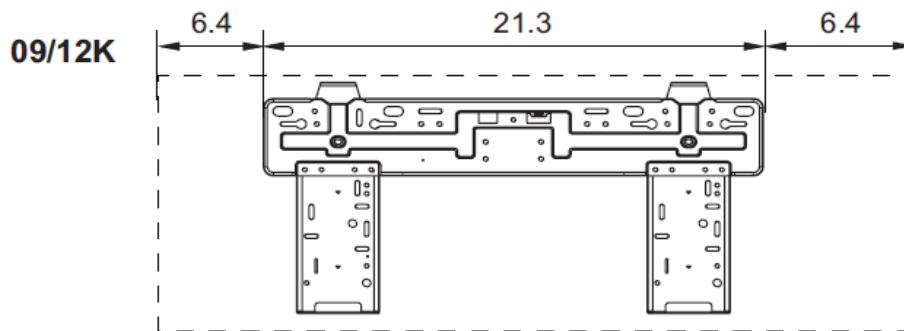

GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity



5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@willisac.com

www.willisac.com