

Single zone inverter mini split

MODEL: OCD09KCH23S



Job Name:

Location:

Engineer Name:

File Resubmit

Contractor:

System No:

Approval Other

Date:

General Features

- Smart 1 Hertz Inverter Technology
- Low Ambient Cooling to 5 °F
- Multiple Fan Speeds
- Memory Function
- Fan Delay Function
- Intelligent Pre-heating / Defrost
- LED display
- Control lock
- Wi-Fi (Optional)
- Auto Clean
- Gold Fin Condenser
- Low Voltage Start-up
- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection



Unit Performance:

<i>Cooling:</i>	
Capacity (Min-Rated-Max, Btu/h)	3,100-9,000- 9,600
SEER	23
EER	14,29
<i>Heating:</i>	
Capacity (Min-Rated-Max, Btu/h)	1,911 -11,000- 12,000
HSPF	10,5
COP (W/W)	3,16

Unit Specification

Refrigerant Type	R410A
Refrigerant Charge (oz)	45,9
ODU Sound Pressure (dB(A))	53
IDU Sound Pressure (dB(A))	29 / 43
ODU Net Weight (lbs)	78
IDU Net Weight (lbs)	22
Dehumidifying (Pint/h)	1,69

Fan

ODU / IDU Type	Axial-flow/Cross-flow
Quantity (ODU + IDU)	1+1
Motor/Drive	Direct Drive
ODU Max Air Flow Rate (CFM)	1799
IDU Air Flow Rate (CFM)	171 / 377

Compressor

Cooling Operation Ambient temp. Range	0~115 °F
Heating Operation Ambient temp. Range	-5~75 °F
Compressor Type	Swing
Fan Motor Output (W)	30
Crankcase Heater	Yes

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 16
MOP (A)	15
MCA (A)	9
Cooling Rated Amps (A)	5,8
Heating Rated Amps (A)	6
Compressor RLA (A)	4
Indoor Fan Motor RLA (A)	0,09
Outdoor Fan Motor RLA (A)	
Nominal Cooling Power Input (kW)	0,63
Nominal Heating Power Input (kW)	1,02


Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	3/8
Additional Refrigerant (oz./ft.)	0.215
Max Pipe Length (ft.)	49.2
Piping Length (no add'l refrigerant, ft.)	24,6
Max Elevation (ft.)	32.8




Capacity Variation Ratio According to Temperature

Cooling

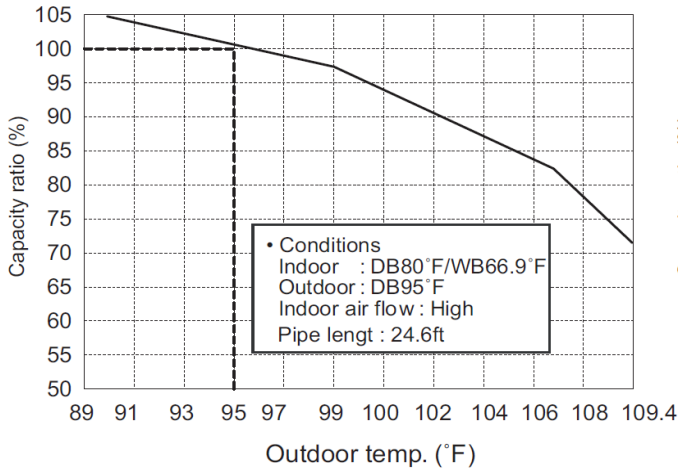

Heating

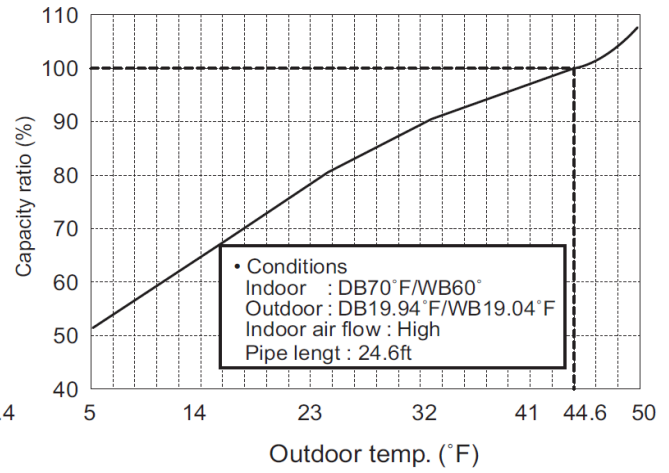


Single zone inverter mini split

MODEL: OCD09KCH23S



Outline Dimension Diagram

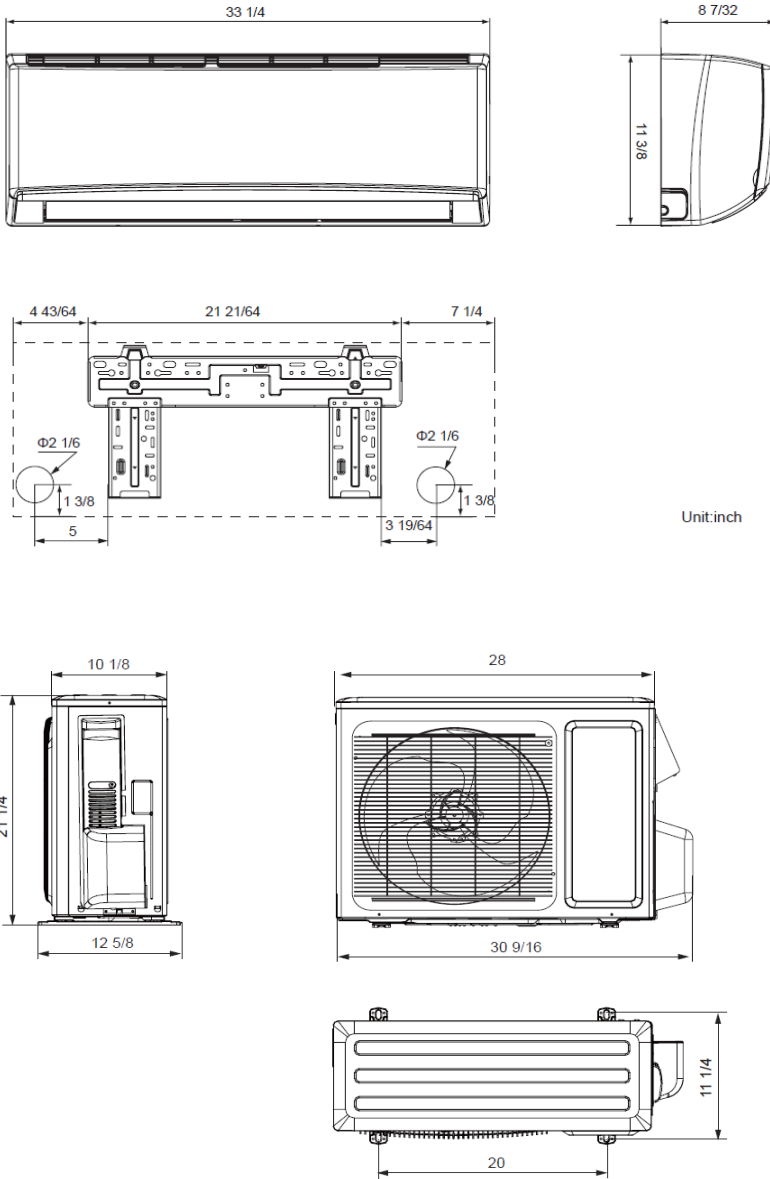

GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity



5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@willisac.com

www.willishvac.com