

Single zone inverter mini split

MODEL: OCD18KCH20S



Job Name:

Location:

Engineer Name:

File Resubmit

Contractor:

System No:

Approval Other

Date:

General Features

- Smart 1 Hertz Inverter Technology
- Low Ambient Cooling to 5 °F
- Multiple Fan Speeds
- Memory Function
- Fan Delay Function
- Intelligent Pre-heating / Defrost
- LED display
- Control lock
- Wi-Fi (Optional)
- Auto Clean
- Gold Fin Condenser
- Low Voltage Start-up
- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection



Unit Performance:

<i>Cooling:</i>	
Capacity (Min-Rated-Max, Btu/h)	6,800-18,000-20,000
SEER	20
EER	12,5
<i>Heating:</i>	
Capacity (Min-Rated-Max, Btu/h)	7,340 -19,800- 23,500
HSPF	10
COP (W/W)	3,35

Unit Specification

Refrigerant Type	R410A
Refrigerant Charge (oz)	56,44
ODU Sound Pressure (dB(A))	55
IDU Sound Pressure (dB(A))	39 / 47
ODU Net Weight (lbs)	105
IDU Net Weight (lbs)	27,6
Dehumidifying (Pint/h)	3,8

Fan

ODU / IDU Type	Axial-flow/Cross-flow
Quantity (ODU + IDU)	1+1
Motor/Drive	Direct Drive
ODU Max Air Flow Rate (CFM)	3200
IDU Air Flow Rate (CFM)	335 / 559

Compressor

Cooling Operation Ambient temp. Range	0~115 °F
Heating Operation Ambient temp. Range	-5~75 °F
Compressor Type	Rotary
Fan Motor Output (W)	60
Crankcase Heater	Yes

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 14
MOP (A)	25
MCA (A)	16
Cooling Rated Amps (A)	10,39
Heating Rated Amps (A)	12,56
Compressor RLA (A)	12,08
Indoor Fan Motor RLA (A)	0,24
Outdoor Fan Motor RLA (A)	0,49
Nominal Cooling Power Input (kW)	1,43
Nominal Heating Power Input (kW)	1,73


Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	5/8
Additional Refrigerant (oz./ft.)	0.2
Max Pipe Length (ft.)	82
Piping Length (no add'l refrigerant, ft.)	24,6
Max Elevation (ft.)	32.8




Capacity Variation Ratio According to Temperature

Cooling

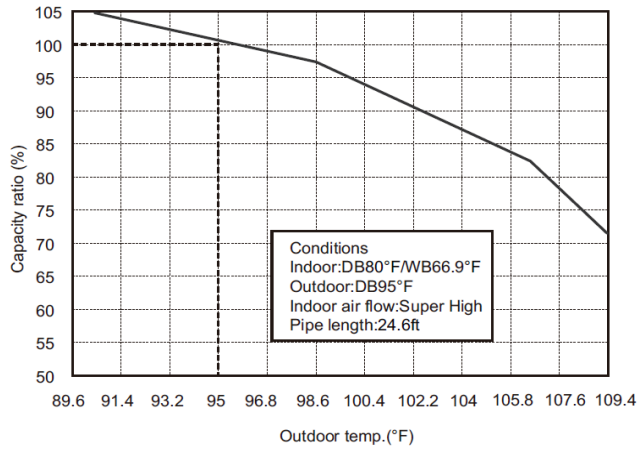

Heating

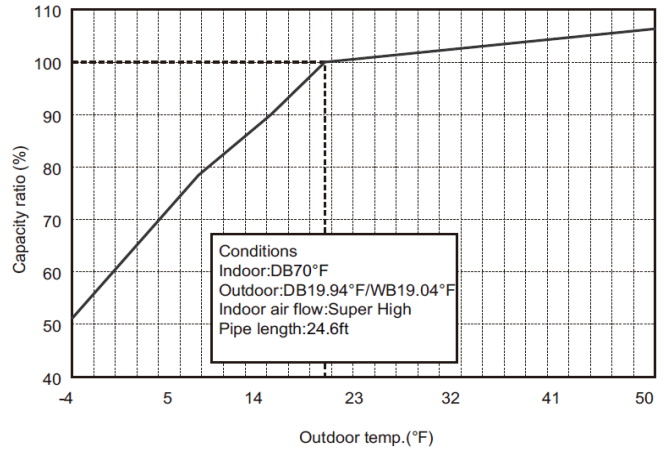


Single zone inverter mini split

MODEL: OCD18KCH20S



Outline Dimension Diagram

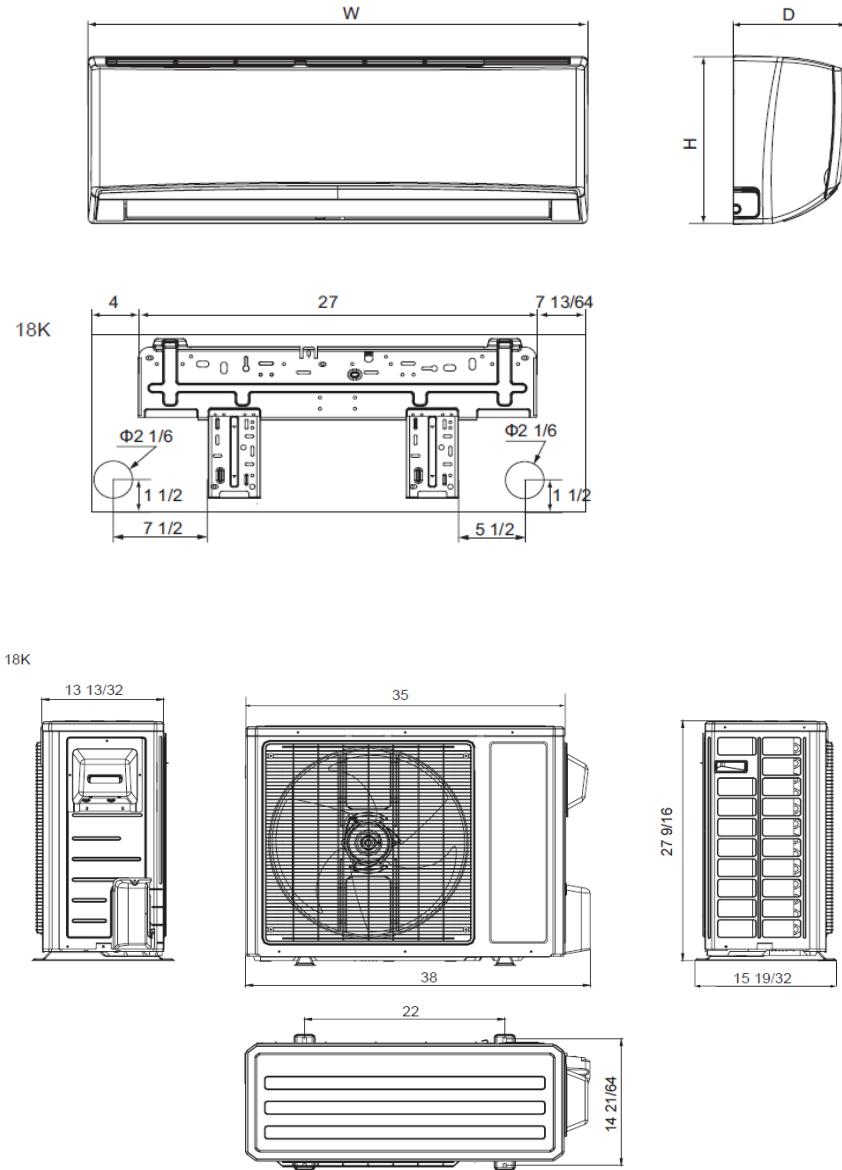

Unit: inch

GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity



5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@willisac.com

www.willishvac.com