

Multi zone inverter mini split

MODEL: CCD18KCHVS



Job Name: _____

Location: _____

Engineer Name: _____

File Resubmit

Contractor: _____

System No: _____

Approval Other

Date: _____

General Features

- 2 Thermistor control
- 24-Hour on/off Timer
- Auto operation
- Auto restart
- Chaos swing
- Control lock function
- Drain Pump
- Inverter
- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection
- Wireless Remote control
- Optional Wired controller
- 4 Ways air distributor



Unit Performance:

Nominal Cooling Capacity (Btu/h)	15 354
Nominal Heating Capacity (Btu/h)	17 000

Set Temperature

Cooling (°F WB)	61~86
Heating (°F DB)	61~86

Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	1/2
Drain OD, ID (in)	1,57

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 18
Rated Amps (A)	0,23

Fan


Type	Centrifugal
Quantity	1
Motor/Drive	Direct Drive
Air Flow Rate (CFM)	353/294/265

Unit Specification

Refrigerant Type	R410A
Refrigerant Control	EEV
Sound Pressure (dB(A))	46/44/42
Primary Filter	Yes
Net Weight (lbs)	39,6
Dehumidification (Pt/h)	3,8
Grill Dimension (in)	25.5x25.5x 1 7/8



Outline Dimension Diagram

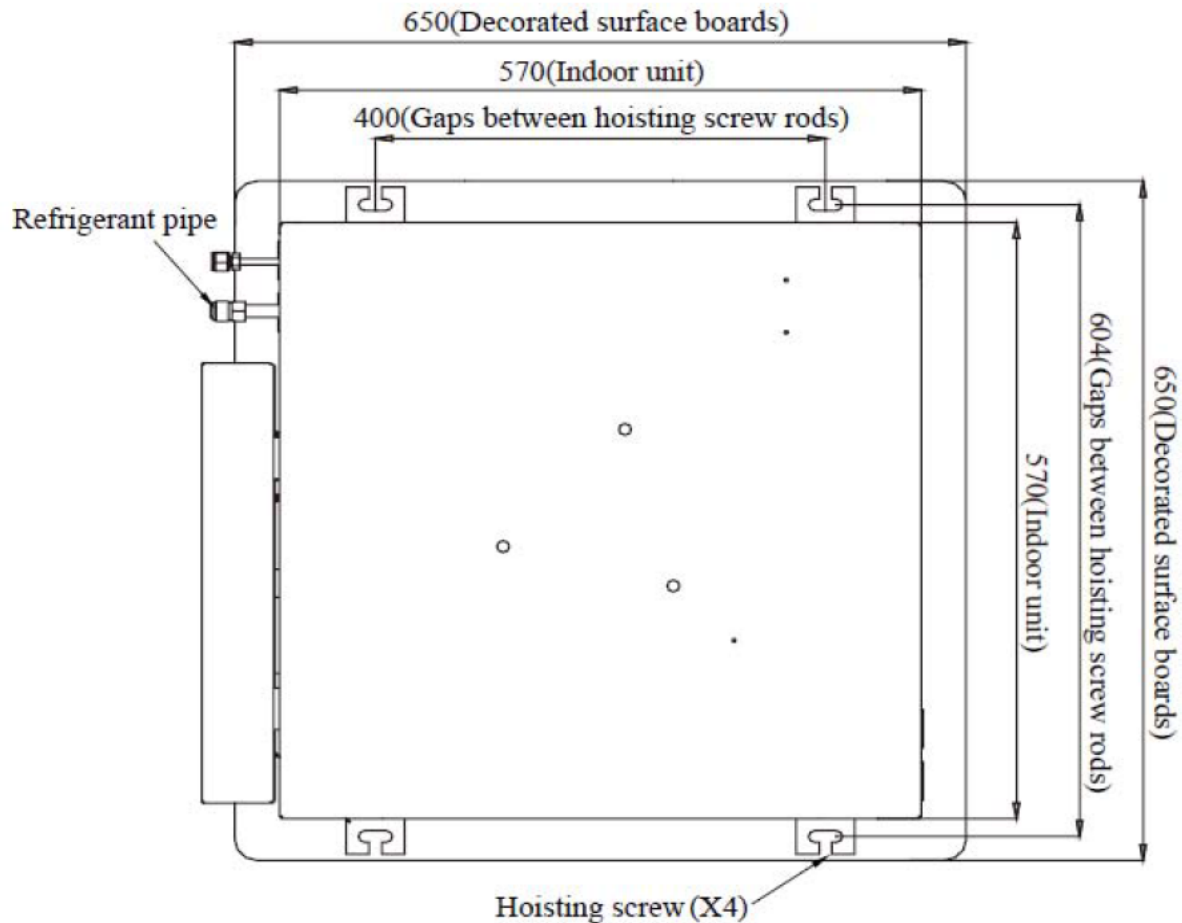

mm	Inch
650	25,59
570	22,44
400	15,74
604	23,77

GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity



5965 Chemin de la Côte de Liesse
 Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@willishvac.com

www.willishvac.com