

Multi zone inverter mini split

MODEL: SMD18KCHVS



Job Name:

Location:

Engineer Name:

File Resubmit

Contractor:

System No:

Approval Other

Date:

General Features

- 2 Thermistor control
- 24-Hour on/off Timer
- Auto operation
- Auto restart
- Chaos swing
- Control lock function
- Drain Pump
- Inverter
- High And Low Pressure Protection Features
- Over Load Protection Features
- Over-Current Protection
- Anti Freeze Protection
- Wired controller
- Optional Wireless Remote control



Unit Performance:

Nominal Cooling Capacity (Btu/h)	15 300
Nominal Heating Capacity (Btu/h)	18 700

Set Temperature

Cooling (°F WB)	61~86
Heating (°F DB)	61~86

Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	1/2
Drain OD, ID (in)	1.57

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 14/4
Rated Amps (A)	0,43


Fan

Type	Centrifugal
Quantity	3
Motor/Drive	Direct Drive
Air Flow Rate (CFM)	412/353/294

Unit Specification

Refrigerant Type	R410A
Refrigerant Control	EEV
Sound Pressure (dB(A))	41/37/33
Primary Filter	Yes
Net Weight (lbs)	59,5
Dehumidification (Pt/h)	3,8



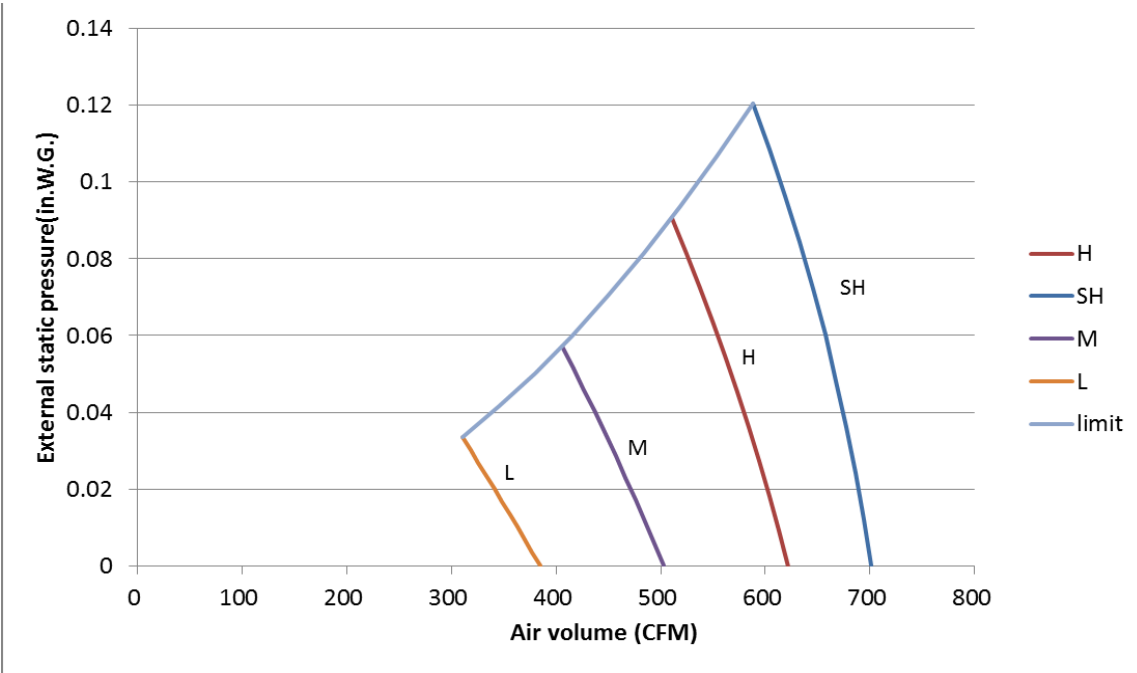


Multi zone inverter mini split

MODEL: SMD18KCHVS



Outline Dimension Diagram

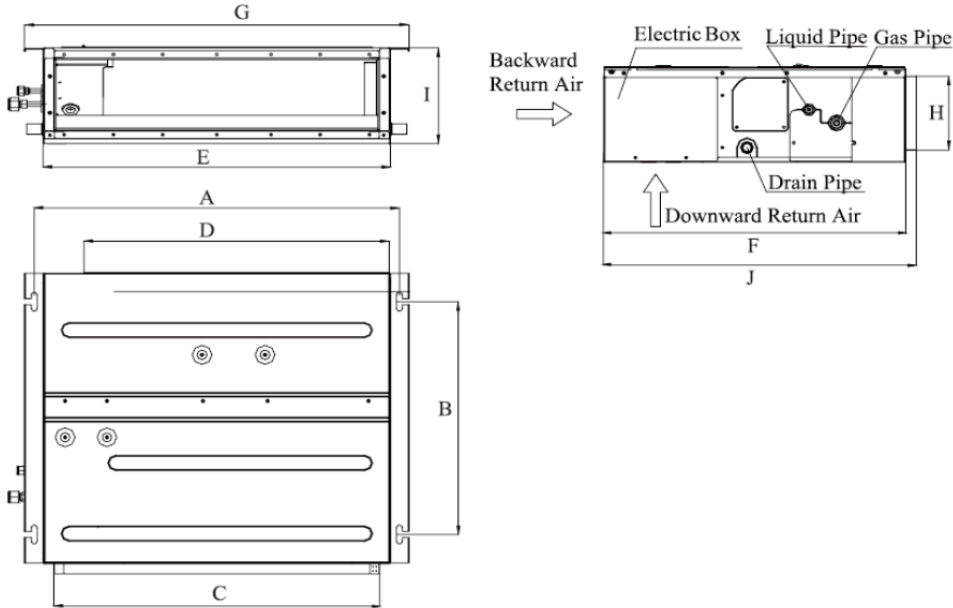

	mm	Inch
A	942	37 3/32
B	491	19 21/64
C	862	33 15/16
D	820	32 9/32
E	900	35 7/16
F	615	24 7/32
G	982	38 21/32
H	156	6 9/64
I	200	4 7/8
J	635	25

GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity



5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@willishvac.com

www.willishvac.com